


AX PRO Series RF Repeater





Key Features

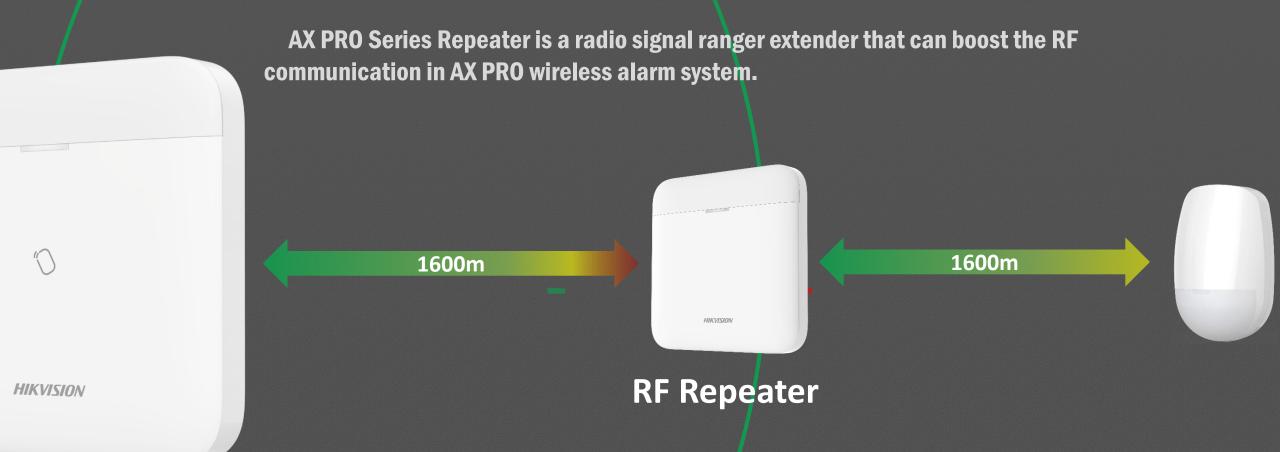



Dual RF-chips, can boost the coverage all kinds of AX PRO Series wireless peripherals.



Extends Tri-X Wireless at a distance up to 1,600 m.



Extends Cam-X Wireless compatible with



PIRCAM by 800 m.



Supports 4 repeaters for one panel.



Finding and connecting detectors automatically, smart auto-pairing.






Smart Auto-pairing

HIKVISION°


*Internal use only

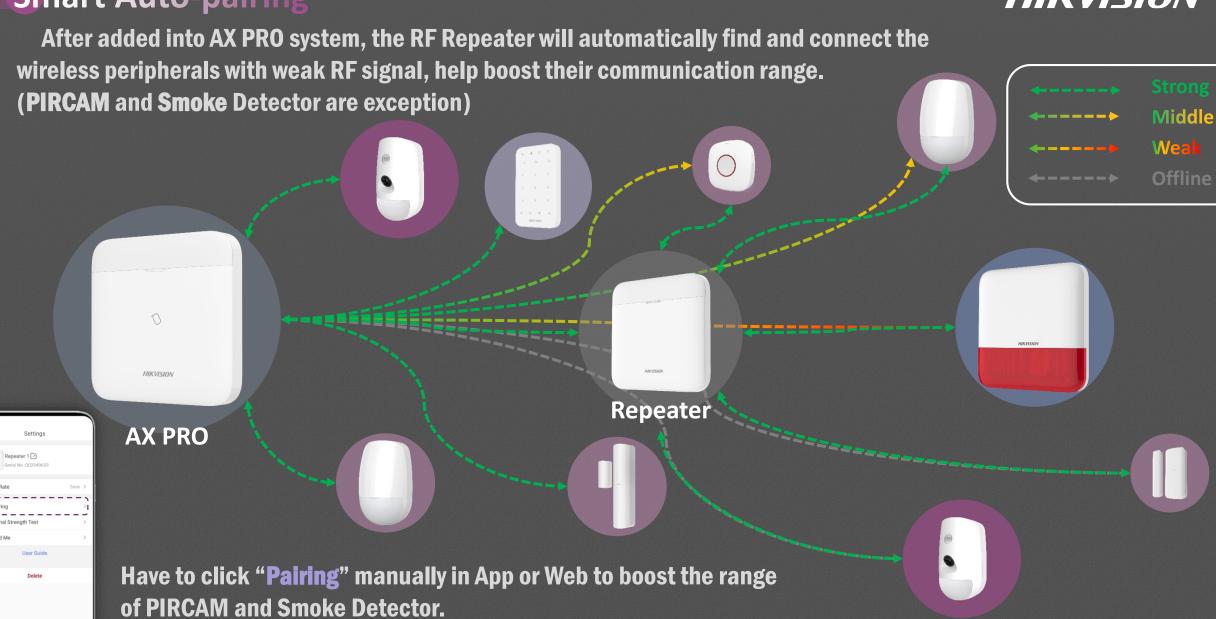





RF Repeater could connect PIRCAM, and could also help forward GIFs to AX PRO panel.

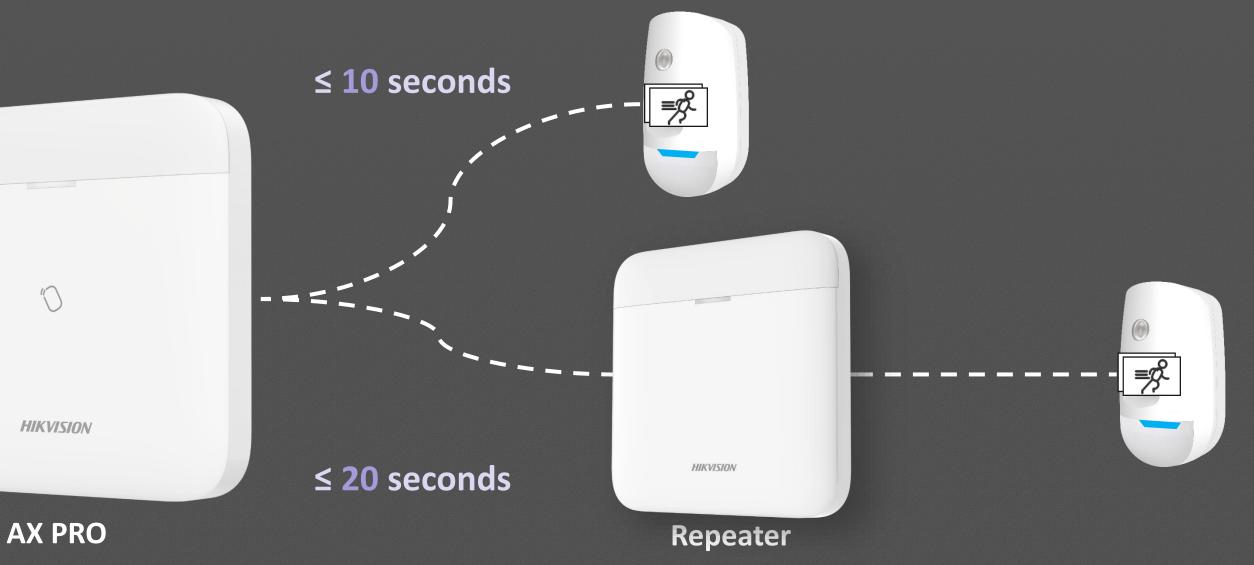







Larger coverage range

One M-level AX PRO panel could support up to 4 repeaters to protect a larger scenario, like a villa, a multi-story office building, and other SMB applications.



More efficient and safer

Adopts Dual RF Chips, repeater could boost the range of all the AX PRO series peripherals, could also forward GIFs to panel for verification.



More intelligent and easier to use

Supports Auto-pairing, repeater could find and connect the wireless peripherals with weak RF signal strength.

AX PRO Hub



Basic features

- Long RF communication range
- Up to 64 Inputs/outputs
- 8 Keypads & Tag Readers
- 32 Keyfobs, 32 Tags, 4 Sounders
- 32 Users, and 16 Partitions
- PIRCAM supported (800m Cam-X Wireless Range)
- 2 * Repeaters

Communication Mode

AX PRO Hub (L)







LAN

WiFi

GPRS

Unique selling Points





SMS



APP



Voice Call





Voice Prompt

Convergence Cloud

Basic features

- Long RF communication range
- Up to 96 Inputs/Outputs
- 8 Keypads & Tag Readers
- 48 Keyfobs, 48 Tags, 6 Sounders
- 48 Users, and 32 Partitions
- PIRCAM supported (800m Cam-X Wireless Range)
- 4 * Repeaters

AX PRO Hub

HIKVISION

(M)





Communication Mode



LAN

WiFi

3/4G

Unique selling Points







APP





Dual-SIM



SMS



Voice Call

Built-in Tag Reader





Voice Prompt

Internal Use Only



Cloud

